



- 111 dB 1W/1m average sensitivity 2 inch exit throat
- 3 inch edgewound aluminum voice coil
- 160 W program power handling
- Pure Aluminum dome - PEN suspension Neodymium ring magnetic structure
- Copper sleeve for flat impedance response
- Excellent thermal exchange

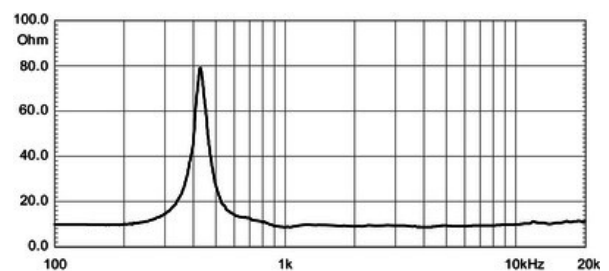

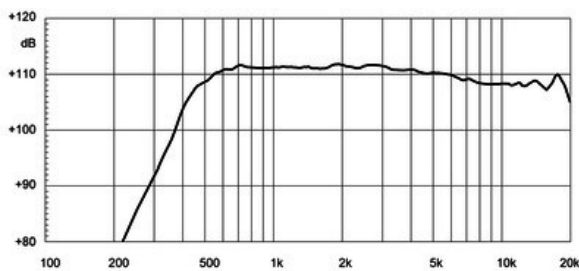

# ND2080A 8Ω

## HF Drivers - 2.0 Inches

### SPECIFICATIONS<sup>1</sup>

Throat Diameter	51 mm (2.0 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.0 Ω
Nominal Power Handling <sup>2</sup>	80 W
Continuous Power Handling <sup>3</sup>	160 W
Sensitivity <sup>4</sup>	111.0 dB
Frequency Range	0.5 - 20.0 kHz
Recommended Crossover <sup>5</sup>	0.8 kHz
Voice Coil Diameter	75 mm (3.0 in)
Winding Material	Aluminum
Diaphragm Material	Aluminum - Pen
Magnet Material	Neodymium

### MOUNTING AND SHIPPING INFO

Overall Diameter	131 mm (5.16 in)
Depth	99 mm (3.9 in)
Net Weight	3.6 kg (7.94 lb)
Shipping Weight	4.0 kg (8.82 lb)
Shipping Box	132x132x103 mm (5.20x5.20x4.06 in)

1. Driver mounted on Eighteen Sound XR2064C horn
2. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. 12 dB/oct. or higher slope high-pass filter.