



- 110 dB SPL 1W-1m average sensitivity
- 2 inch exit throat
- 220W maximum program power handling
- Next-gen 4 slot phase plug design
- Edgewound 75 mm (3 in) CCAW voice coil
- Titanium Dome over PEN suspension diaphragm assembly
- HF copper ring for reduced distortion and increased output

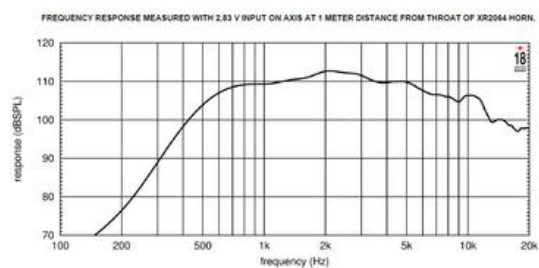

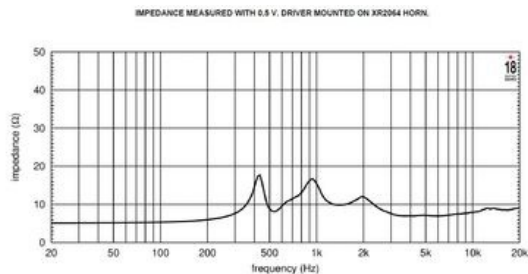

# HD3020T 8Ω

## HF Drivers - 2.0 Inches

### SPECIFICATIONS<sup>1</sup>

Throat Diameter	50 mm (2.0 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
Nominal Power Handling <sup>2</sup>	110 W
Continuous Power Handling <sup>3</sup>	220 W
Sensitivity <sup>4</sup>	110.0 dB
Frequency Range	0.8 - 20.0 kHz
Recommended Crossover <sup>5</sup>	1.0 kHz
Voice Coil Diameter	75 mm (3.0 in)
Winding Material	Aluminum
Diaphragm Material	Titanium - Pen
Flux Density	1.9 T
Magnet Material	Ferrite

### MOUNTING AND SHIPPING INFO

Overall Diameter	170 mm (6.69 in)
Depth	68 mm (2.68 in)
Net Weight	4.9 kg (10.8 lb)
Shipping Box	190x175x85 mm (7.48x6.89x3.35 in)

1. Driver mounted on Eighteen Sound XR2064C horn
2. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. 12 dB/oct. or higher slope high-pass filter.